


INSTRUCTION

663-0378
12/14



CE □ 230/110 V ⚡ 42/24 V IP54



LED M

LED L




LED M	230 V (220-240 V), 50-60 Hz 110 V (90-130 V), 0/50-60 Hz 42 V (35-50 V), 50-60 Hz 24 V (20-35V), 50-60 Hz	H 560	8 x LED, 5000K	6,9kg
-------	--	-------	----------------	-------

LED L	230 V (220-240 V), 50-60 Hz 110 V (90-130 V), 0/50-60 Hz 42 V (35-50 V), 50-60 Hz 24 V (20-35V), 50-60 Hz	H 820	16 x LED, 5000K	9,0kg
-------	--	-------	-----------------	-------

EN 12464



EN 12464








Temperaturbereich / temperature range



-20 ... +30 °C


Aufstellarten / types of installation:

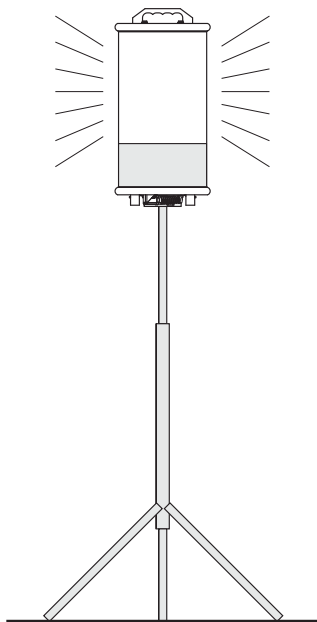


Schaltungsvarianten / circuit variations:



0



I



II

