




Dome lights
4017506085130
D 185, H 230

portable
anthracite

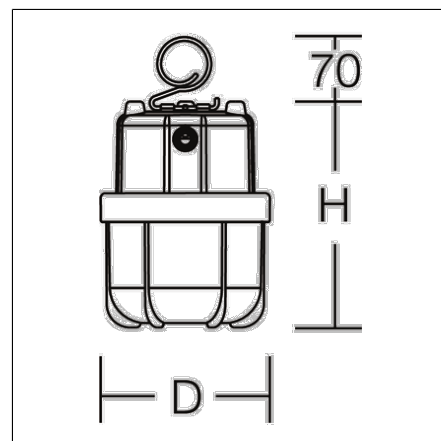

Dome luminaire. Impact-resistant and break-proof 2-component plastic housing. Cover opal, made of impact- and break-resistant plastic (polycarbonate). Uniform, soft and glare-reduced illumination. Folding hook made of stainless steel with drop protection. Can be used as a pendant luminaire or standing on the floor. Heavy rubber power supply cable H07RN-F for high mechanical loads with mains plug. A socket outlet enables the connection of additional luminaires or electrical devices. Extensive accessories optionally available (tripods, mounting rails, magnetic holders, etc.).

Product specifications

Diameter D	185 mm
Height H	230 mm
Weight	1.9 kg
Steckdosen	1 x CEE 4h 16A 3p (110VAC)
Supply cable / plug	5 m, H07RN-F, 3 x 1,5 mm ² / CEE 4h 16A 3p (110VAC)
Light source	LED
Colour temperature	5000 K
Rated luminous flux	4100 lm
System power	26 W
System efficiency	158 lm/W
Glare evaluation RUG (4H 8H)	27,2
Beam angle	down 138° up 180°
LED rated life	25000 h (L70/B10)
Colour rendering index (CRI)	80
Colour tolerance (McAdam)	5 SDCM
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	90 - 130 V / 50 Hz, 60 Hz
CIE Flux Code / CEN Flux Code	37 66 87 86 100
Type of protection	IP 44
Protection class	I
Filament test	650 °C
Impact resistance	IK07
Ambient temperature	-20 °C to + 30 °C
Safety marks	D-mark
Conformity mark	CE

