



Tube light

68A301B0-0062 | Tube lights

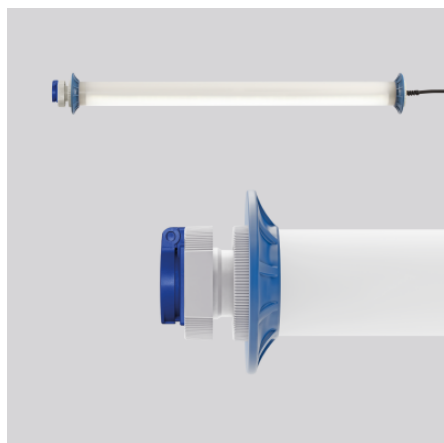

Tube lights
4017506094866
D 120, L 1030

Ceiling mounting, Wall (surface)
grey

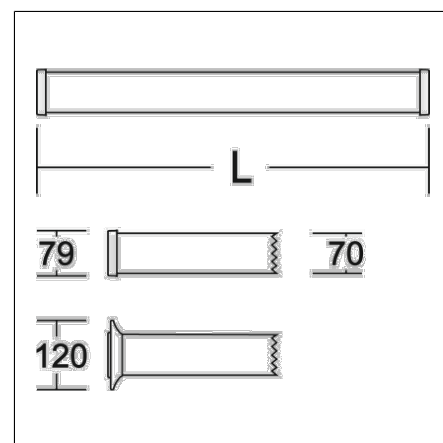

Protection tube plastic (polycarbonate) opal, shockproof. End caps made of plastic (polyamide) grey. Protectors made of soft plastic at the ends for protection during mobile use. Uniform, soft and glare-reduced illumination. Driver integrated. A socket outlet enables the connection of additional luminaires or electrical devices. Heavy rubber power supply cable H07RN-F for high mechanical loads with mains plug. Suitable for wall, ceiling and pendant mounting due to accessories (optional). Mounting set must be ordered separately. Luminaire with limited surface temperature in accordance with EN 60598-2-24.

Product specifications

Length L	1030 mm
Diameter D	120 mm
Weight	3.1 kg
Light source	LED
Colour temperature	5000 K
Rated luminous flux	5100 lm
System power	31 W
System efficiency	165 lm/W
Glare evaluation RUG (4H 8H)	26,9
Beam angle	down 139°/103° up 180°/96°
LED rated life	50000 h (L90/B50)
Colour rendering index (CRI)	80
Colour tolerance (McAdam)	3 SDCM
Photobiological safety according to EN 62471	Risk group 0
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	22
Luminaires on B16A fuse	37
Luminaires on C10A fuse	38
Luminaires on C16A fuse	62
Inrush current / Inrush current duration	23 A / 176 µs
CIE Flux Code / CEN Flux Code	41 70 89 88 100
Type of protection	IP 54
Protection class	I
Filament test	650°C - 30 seconds
Impact resistance	IK08 (5 Joule)
Ambient temperature	-20 °C to + 40 °C
Safety marks	D-mark
Conformity mark	CE
Steckdosen	1 x Typ E (CEE 7/5)
Supply cable / plug	5 m, H07RN-F, 3 x 1,5 mm² / Typ E+F (CEE 7/7)
Type of protection	IP 54

Accessories



68Z00001
Mounting bracket (plastic) (set = 2 pieces)



68Z00003
Mounting bracket (plastic) with magnet (Set = 2 pieces)



68Z00004
Mounting bracket (metal) with hanger assembly of stainless steel (set = 2 pieces)



68Z00006
Mounting bracket (metal) with expander suspension (L 600 mm), set (2 pcs.)



68Z00005
Mounting bracket (metal) with adjustable belt suspension (L 330-550 mm), set (2 pcs.)



68Z00002
Mounting bracket (metal) with magnet (set = 2 pieces)



68Z00007
Magnetic holder, mounting bracket (plastic) with rubberised magnet, set (2 pieces)



68Z00016
Mounting bracket (plastic) with key ring, rotatable luminaire, set (2 pcs.)



68Z00017
Mounting bracket (plastic) with expander suspension (L 600 mm), rotatable luminaire, set (2 pcs.)



68Z00008
Mounting bracket (plastic) with adjustable belt suspension (L 330-550 mm), rotatable luminaire, set (2 pcs.)

Tube light

68A301B0-0062 | Tube lights

