




Large-area lights
4017506105456
L 750, B 630, H 250

portable
white

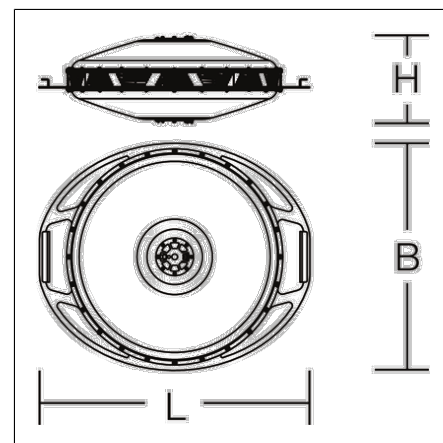

Large area luminaire. Housing: aluminium, powder-coated. Cover opal, made of impact- and break-resistant plastic (polycarbonate). Highly efficient COB LED. Uniform, soft and glare-reduced illumination. Can be used on a tripod or suspended. Incl. adapter for spigot mounting (d=30 mm, DIN 14640) with the option of straight or 30° inclined mounting.

Product specifications

Length L	750 mm
Width B	630 mm
Height H	250 mm
Weight	15 kg
Supply cable / plug	10 m, H07BQ-F, 3 x 1,5 mm ² / Typ E+F (CEE 7/7)
Light source	LED
Colour temperature	5000 K
Rated luminous flux	57000 lm
System power	380 W
System efficiency	150 lm/W
Glare evaluation RUG (4H 8H)	29,8
Beam angle	115°
LED rated life	100000 h (L80/B10)
Colour rendering index (CRI)	82
Colour tolerance (McAdam)	3 SDCM
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter
Control	on/off
Voltage	220 - 240 V / 50 Hz, 60 Hz
Luminaires on B10A fuse	2
Luminaires on B16A fuse	4
Luminaires on C10A fuse	4
Luminaires on C16A fuse	6
Inrush current / Inrush current duration	23.04 A / 63 µs
CIE Flux Code / CEN Flux Code	44 75 92 97 100
Type of protection	IP 65
Protection class	I
Filament test	650 °C
Impact resistance	IK10
Ambient temperature	-20 °C to + 40 °C
Safety marks	D-mark
Conformity mark	CE

Accessories



95-0254-0014
Tripod adapter, 28 mm / 30 mm (DIN 14640)



95-0255-0014
Adapter for suspended mounting, D=17 mm



95-0257-0014
Tripod 'Professional', Hmax 4,45m, Hmin 1,1m



95-0267-0001
Bracing set, 3x rope cord and peg



95-0257-0014S1
Set Tripod "Professionell", includes Tripod 'Professionell' and carrier box



95-0060-0014.D
Crank tripod 'Premium', Hmax 3,80 m, Hmin 1,74m



95-0256-0040
Transport box for POWERDISK, wood



95-0259-0001
Carrier bag for 'POWERDISK', handles, shoulder belt and transport rollers



95-0060-0014S1
Crank tripod 'Premium', incl. Tripod adapter d=30 mm (DIN 14640), bracing set and carrier box

